


CS600 / CS500



The CS600 series square diffusers with circular rear collar have a sophisticated design. The adjustable front plate makes them particularly suitable for environments having particular architectural requirements.

MATERIAL AND FINISH

- Painted aluminum, white RAL 9010
- Distribution plenum in galvanized sheet.

APPLICATION

- Can be used for installation on false ceiling or on visible ducting
- Plate adjustable in 5 positions to be able to change the airflow
- from vertical to horizontal in order to best exploit the Coanda effect
- summer ΔT up to -10 K and winter up to +15 K
- Suitable for installation height between 2.7 and 4 m
- CS500 version for flush false ceiling mounting.

FASTENING

Duct-mounted or false-ceiling mounted with non-visible screws and mounting bar or with plenum.

VERSIONS

- **CS600** square diffuser for overhanging assembly.
- **CS601** square diffuser for overhanging assembly with telescopic regulating damper on the collar.
- **CS500** square diffuser for flush false ceiling assembly.
- **CS601** square diffuser for flush false ceiling assembly with telescopic regulating damper on the collar.

ACCESSORIES

Distribution plenum in the versions:

DPS plenum without insulation

DPSI plenum with internal insulation in polyethylene with th. 6 mm, **certified according to Euroclass B-s2-d0.**

- External insulation (UPON REQUEST).

AIR FLOW DIRECTION ADJUSTMENT




Horizontal air supply Vertical air supply

PRICES

Model	CS600	CS601	CS500	CS501	Accessories	
					DPS	DPSI
125						
160						
200						
250						
315						


DIMENSIONS

CS6011 overhanging assembly

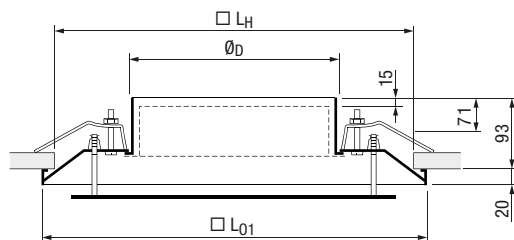

Model	Dimensions [mm]		
	□L ₀₁	□L _H	Ø _D
125	330	305	123
160	330	305	158
200	370	345	198
250	420	395	248
315	485	460	313


CS501 flush-to-ceiling assembly

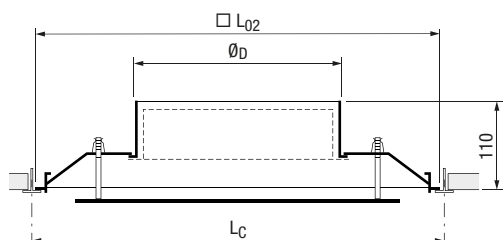

Model	Dimensions [mm]		
	□L _C	□L ₀₂	Ø _D
125	350	344	123
160	350	344	158
200	600	594	198
250	600	594	248
315	600	594	313

CS600 / CS500

QUICK SELECTION

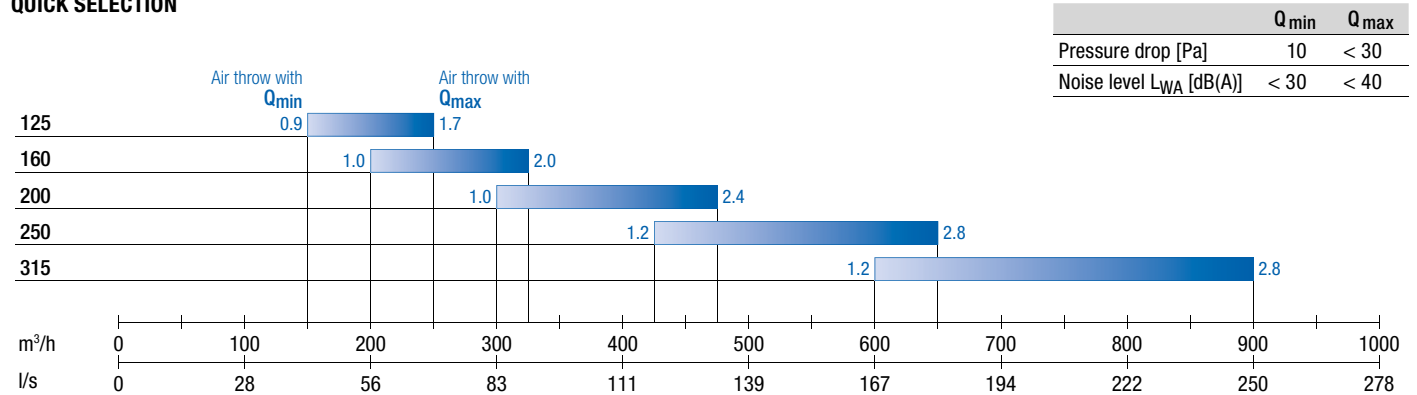


ACCESSORIES

DPS plenum

Distribution plenum in galvanized steel with circular side collar. Without regulating damper.

DPSI plenum

Galvanized steel distribution plenum with internal insulation in polyethylene with th. 6 mm, **certified according to Euroclass B-s2-d0**. Without regulating damper.

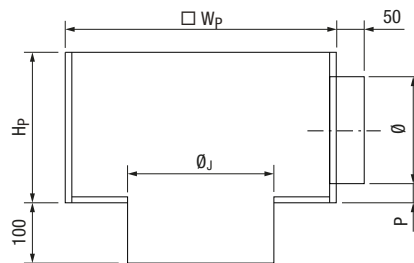

Model	Dimensions [mm]				
	Ø _J	□W _p	P	Ø	H _p
125	125	345	31	123	185
160	160	345	31	123	185
200	200	395	31	158	220
250	250	470	36	198	270
315	315	520	31	248	310