


# DC560S

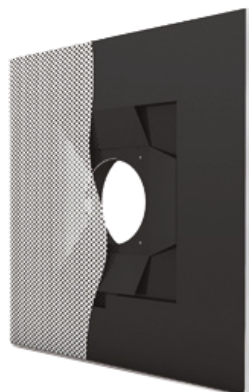

DC560S omnidirectional diffusers with perforated panel, complete with plenum with side collar, can be configured, with manual adjustment, as 1, 2, 3 or 4-way diffusers using internal deflectors and special springs.

**MATERIAL AND FINISH**

- Diffuser in painted steel, white RAL 9010
- Plenum in galvanized steel sheet.

**APPLICATION**


- Manual adjustment for 1, 2, 3 and 4-way configurations
- Suitable for installation height between 2.7 and 4 m
- Also suitable for installation in false ceiling with 600 x 600 mm panels
- summer  $\Delta T$  up to -10 K and winter up to +15 K.

**FASTENING**


Diffuser complete with plenum fastened to the ceiling by hanging.

**VERSIONS**

- DC560S diffuser to configure with 1, 2, 3 and 4 ways, complete with plenum and equalizer.
- DC560SG diffuser to configure with 1, 2, 3 and 4 ways, complete with insulated plenum **Fire reaction class M1 (NFP92-507), V-0 (UL94)** and equalizer.

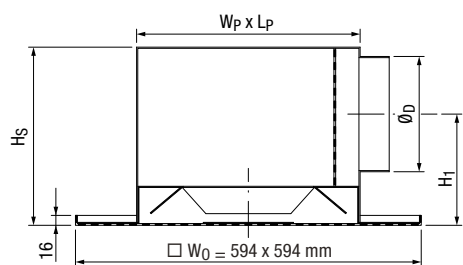


DC560S - 125, 160, 200

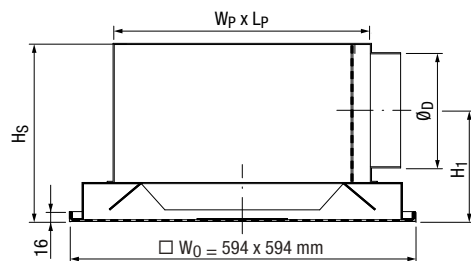

DC560S - 250, 315

**THROW DIRECTION**

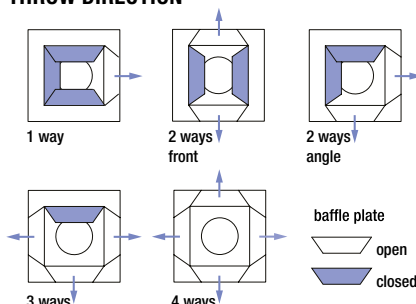


**PRICES**

Model	DC560S	DC560SG
125		
160		
200		
250		
315		


**DIMENSIONS**

Model	Dimensions [mm]				
	Wp	Lp	Hs	ØD	H1
125	241	266	226	125	150
160	307	336	260	160	166
200	383	414	305	200	191
250	377	400	405	250	266
315	474	451	508	315	338

**QUICK SELECTION**

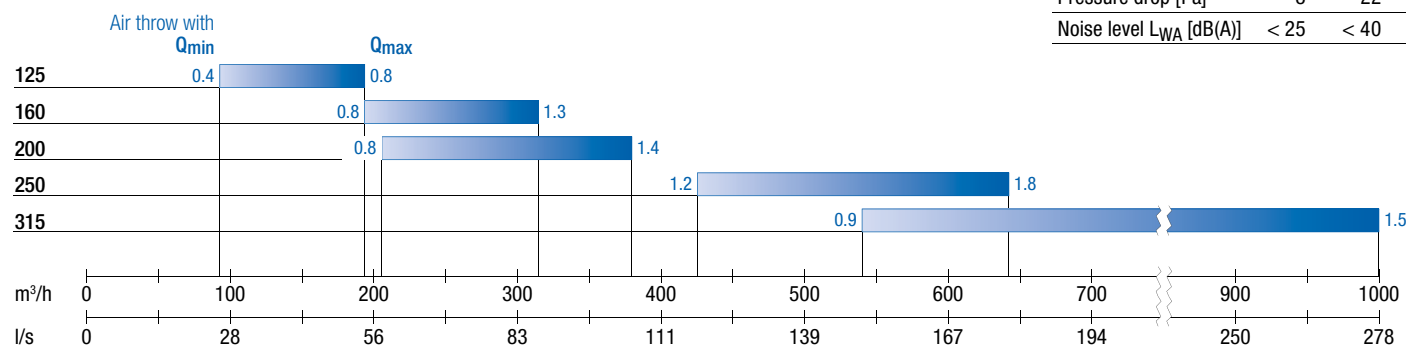

# DC560T

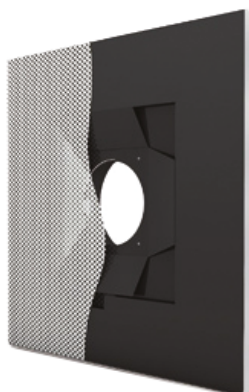

DC560T omnidirectional diffusers with perforated panel, with rear collar, can be configured, with manual adjustment, as 1, 2, 3 or 4-way diffusers using internal deflectors and special springs.

**MATERIAL AND FINISH**

- Diffuser in painted steel, white RAL 9010
- Plenum in galvanized steel sheet.

**APPLICATION**

- Manual adjustment for 1, 2, 3 and 4-way configurations.
- Suitable for installation height between 2.7 and 4 m

- Also suitable for installation in false ceiling with 600 x 600 mm panels
- summer  $\Delta T$  up to -10 K and winter up to +15 K.


**FASTENING**

Diffuser complete with plenum fastened to the ceiling by hanging.

**VERSIONS**


- DC560T diffuser to configure with 1, 2, 3 and 4 ways, complete with plenum.

**THROW DIRECTION**

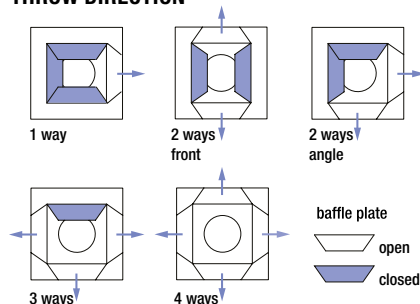

**PRICES**

Model	DC560T
125	
160	
200	
250	
315	

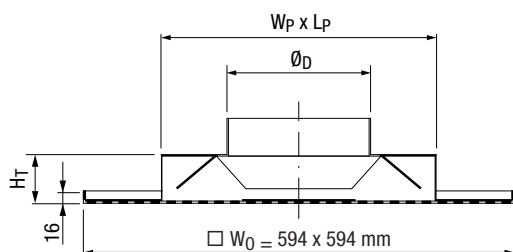

**DIMENSIONS**

Model	Dimensions [mm]			
	Wp	Lp	Ht	ØD
125	240	240	55	125
160	305	305	55	160
200	381	381	60	200
250	548	548	90	250
315	548	548	90	315

**QUICK SELECTION**

	Q <sub>min</sub>	Q <sub>max</sub>
Pressure drop [Pa]	10	20
Noise level L <sub>WA</sub> [dB(A)]	< 30	< 40

