


AGS300

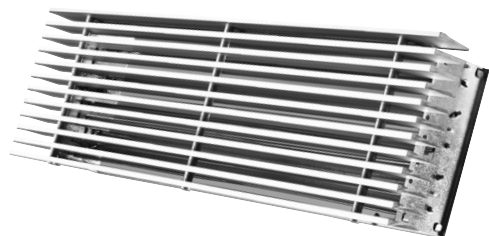

The AGS300 aluminum heavy-duty floor grilles consist of sturdy fixed bar blades inclined 0°, particularly suitable for installation on floating floors.

MATERIAL AND FINISH

- Natural anodized aluminum
- Damper in galvanized steel
- Dirt trap in galvanized steel

APPLICATION

Suitable for installation on floating floors. Can be used both in supply and in return.

FASTENING

Lying flat on the floor.

VERSIONS

- AGS300 with fixed bars with 0° deflection
- AGS307 with fixed bars with 0° deflection and regulating damper

ACCESSORIES

GT007 regulating damper with opposed multiple blades

RP/AGS dirt trap


SPS kit of shims in 3 different heights to fasten on the back of the grille to adjust the floor thickness when other than the standard 30 mm (see drawing and dimension x = 40 - 45 - 50 mm).

PRICES


Model	AGS300	AGS307	Accessories	
			RP/AGS	SPS
600 x 150				
600 x 200				
600 x 300				
600 x 600				

For the SPS product, always specify the height of the tile (40, 45, 50 mm)


DIMENSIONS

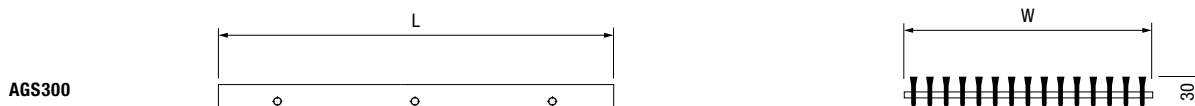

ACCESSORIES

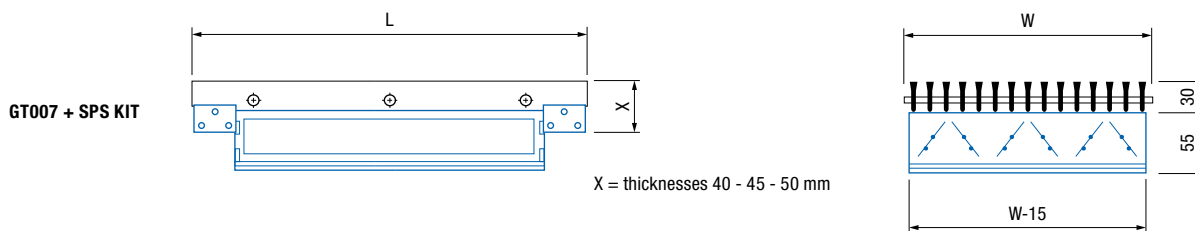

X = thicknesses 40 - 45 - 50 mm

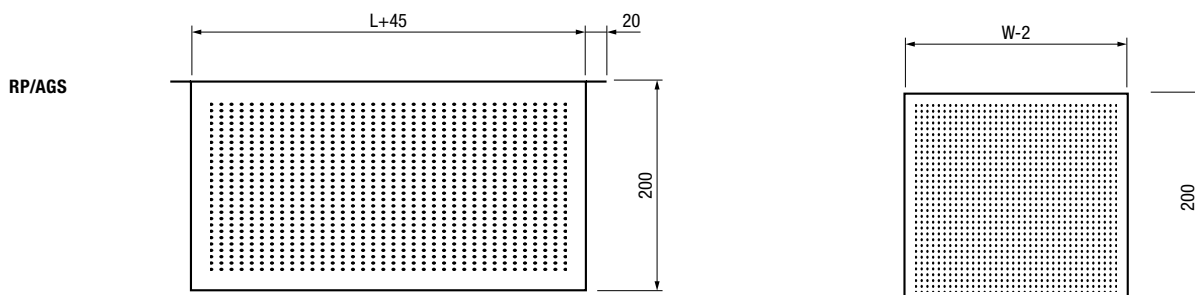

AGS300

AIR DIFFUSION

QUICK SELECTION

	Q _{min}	Q _{max}
Pressure drop [Pa]	5	< 20
Noise level L _{WA} [dB(A)]	< 20	< 30

