


GT018

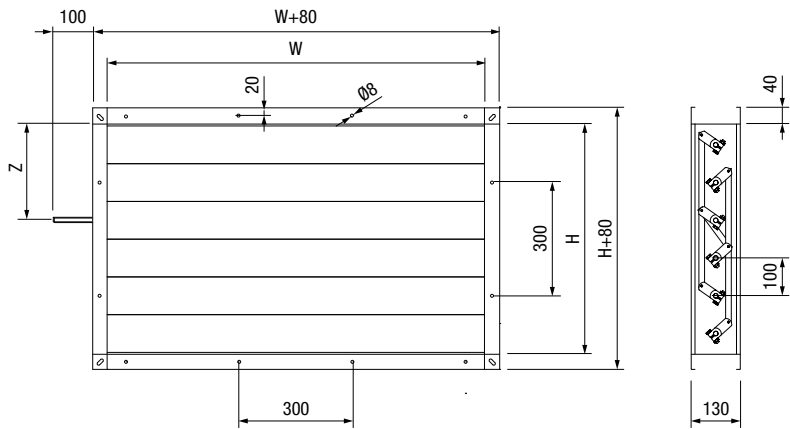

- VERSIONI**
- GT018 T tenuta fumi Classe 2B in accordo alla EN 1751
 - ATEX
 - II 2G Ex h IIC T6 Gb
 - II 2D Ex h IIIC T85°C Db
 - Verniciata (PREZZI A RICHIESTA)
 - Perni passanti (PREZZI A RICHIESTA)
 - Telaio spessore maggiorato (PREZZI A RICHIESTA)

DISTRIBUZIONE ARIA

Alette	Z	H	W [mm]													
			200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500
nr	[mm]	[mm]	€	€	€	€	€	€	€	€	€	€	€	€	€	€
2	55	210														
3	55	310														
4	255	410														
5	255	510														
6	255	610														
7	255	710														
8	455	810														
9	455	910														
10	455	1010														
11	455	1110														
12	655	1210														
13	655	1310														
14	655	1410														
15	655	1510														
16	855	1610														
17	855	1710														
18	855	1810														
19	855	1910														
20	1055	2010														

Versione GT018 T +5%
Versione ATEX PREZZI A RICHIESTA

Coppia minima necessaria	
2 Nm	
4 Nm	
5 Nm	
10 Nm	
15 Nm	
20 Nm	
30 Nm	