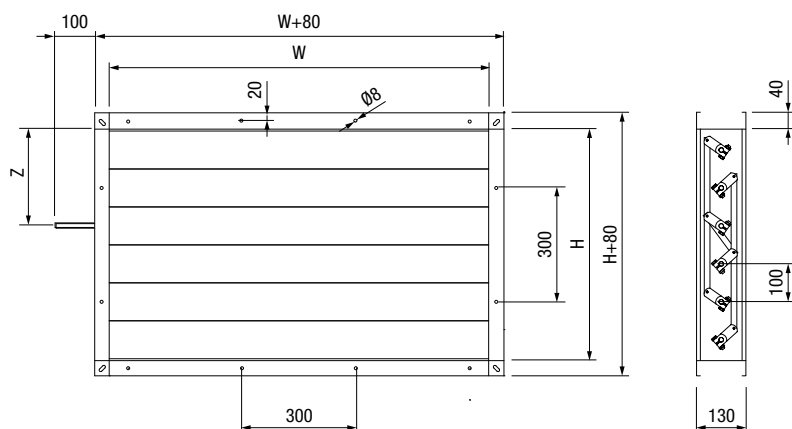


GT019**VERSIONS**

- GT019 T tightness class 2B according to EN 1751
- ATEX
 - II 2G Ex h IIC T6 Gb
 - II 2D Ex h IIIC T85°C Db
- Painting (PRICES ON REQUEST)
- Through shafts (PRICES ON REQUEST)
- Increased frame depth (PRICES ON REQUEST)

Blades	Z	H	W [mm]															
			200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500		
nr	[mm]	[mm]	€	€	€	€	€	€	€	€	€	€	€	€	€	€		
2	55	210																
3	55	310																
4	255	410																
5	255	510																
6	255	610																
7	255	710																
8	455	810																
9	455	910																
10	455	1010																
11	455	1110																
12	655	1210																
13	655	1310																
14	655	1410																
15	655	1510																
16	855	1610																
17	855	1710																
18	855	1810																
19	855	1910																
20	1055	2010																

GT019 T version +5%

ATEX version PRICES ON REQUEST

Min.necessary torque	
2 Nm	
4 Nm	
5 Nm	
10 Nm	
15 Nm	
20 Nm	
30 Nm	