


GTA010EN

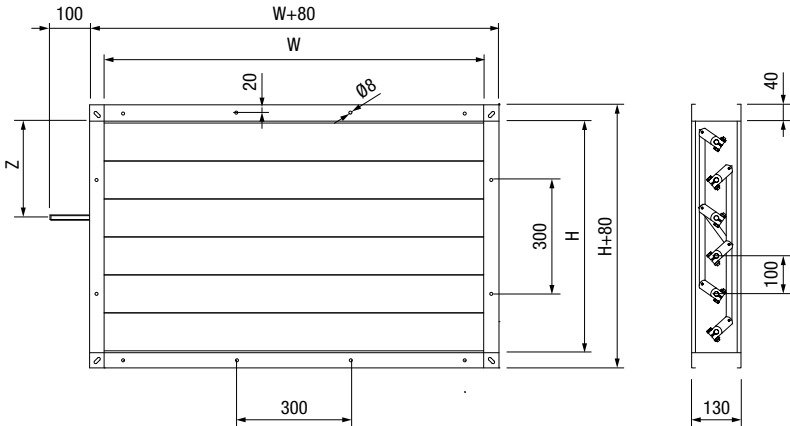

VERSIONI

- GTA010EN tenuta fumi Classe 3B in accordo alla EN 1751
- GTA010EN T tenuta fumi Classe 4C in accordo alla EN 1751
- ATEX
 - II 2G Ex h IIC T6 Gb
 - II 2D Ex h IIIC T85°C Db
- Verniciata (PREZZI A RICHIESTA)
- Levismi con ingranaggi (PREZZI A RICHIESTA)

Alette	Z	H	W [mm]													
			200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500
nr	[mm]	[mm]	€	€	€	€	€	€	€	€	€	€	€	€	€	€
2	55	210														
3	55	310														
4	255	410														
5	255	510														
6	255	610														
7	255	710														
8	455	810														
9	455	910														
10	455	1010														
11	455	1110														
12	655	1210														
13	655	1310														
14	655	1410														
15	655	1510														
16	855	1610														
17	855	1710														
18	855	1810														
19	855	1910														
20	1055	2010														

Versione GTA010EN T +10%
 Versione ATEX PREZZI A RICHIESTA
 Ruote dentate +7%

Coppia minima necessaria	
2 Nm	
4 Nm	
5 Nm	
10 Nm	
15 Nm	
20 Nm	
30 Nm	