


GTA015EN

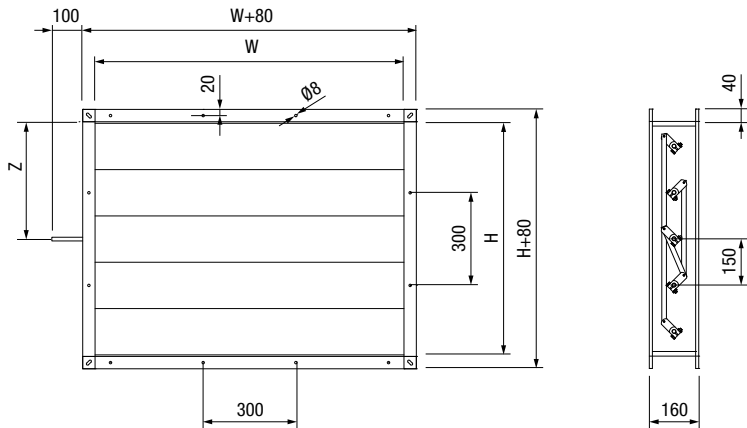

- VERSIONI**
- **GTA015EN** tenuta fumi Classe 3B in accordo alla EN 1751
 - **GTA015EN T** tenuta fumi Classe 4C in accordo alla EN 1751
 - **ATEX**
 - II 2G Ex h IIC T6 Gb
 - II 2D Ex h IIIC T85°C Db
 - **Verniciata** (PREZZI A RICHIESTA)

DISTRIBUZIONE ARIA

Alette	Z	H	W [mm]													
			200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500
nr	[mm]	[mm]	€	€	€	€	€	€	€	€	€	€	€	€	€	€
2	80	310														
3	80	460														
4	380	610														
5	380	760														
6	380	910														
7	380	1060														
8	680	1210														
9	680	1360														
10	680	1510														
11	680	1660														
12	980	1810														
13	980	1960														
14	980	2110														
15	980	2260														
16	1280	2410														

Alette	Z	H	W [mm]				
			1600	1700	1800	1900	2000
nr	[mm]	[mm]	€	€	€	€	€
2	80	310					
3	80	460					
4	380	610					
5	380	760					
6	380	910					
7	380	1060					
8	680	1210					
9	680	1360					
10	680	1510					
11	680	1660					
12	980	1810					
13	980	1960					
14	980	2110					
15	980	2260					
16	1280	2410					

Coppia minima necessaria
2 Nm
4 Nm
5 Nm
10 Nm
15 Nm
20 Nm
30 Nm
40 Nm
50 Nm

Versione GTA015EN T +10%
Versione ATEX PREZZI A RICHIESTA