

# GT015



Regulating damper in galvanized steel with blades pitch 150 mm with opposed movement.

### MATERIAL AND FINISH


A Frame in galvanized sheet Z140, 4 welded pieces, flange 40 mm, thickness 1.5 mm.

B Blades in galvanized sheet Z140, opposed movement, thickness 0.6 + 0.6 mm.

C Pins in galvanized steel Ø12 mm secured to the blades with bolts.

D NYLON bushes.

E Aluminum side plates

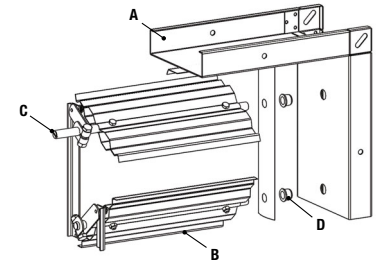

### VERSIONS

- GT015 T Gas tightness Class 2 B N1751 + 10%
- GT017 AISI 304 (PRICES UPON REQUEST)
- GT020 AISI 316 (PRICES UPON REQUEST)
- Frame thickness  
oversize (PRICES UPON REQUEST)
- ATEX II 2 GD + 33 €

### ACCESSORIES

Manual commands see page 273.  
Electric actuators see page 274.

### DIMENSIONS AND PRICES

Blades	Z	H	W [mm]								
			200	300	400	500	600	700	800	900	1000
no.	[mm]	[mm]	€	€	€	€	€	€	€	€	€
2	80	310									
3	80	460									
4	380	610									
5	380	760									
6	380	910									
7	380	1060									
8	680	1210									
9	680	1360									
10	680	1510									
11	680	1660									
12	980	1810									
13	980	1960									
14	980	2110									
15	980	2260									
16	1280	2410									

NB: For the prices of the intermediate sizes, consider the next size on the table.

Ex.: 250 x 310 mm = 300 x 310 mm

For basic sizes > 2000 mm, construction in double dependent section:

just one command that moves the two sections at the same time.

Composition of price:

2600 x 760 mm = 2\* 1300 x 760 mm

Torque min; 8 Nm/m<sup>2</sup>

\* See tech data sheet

## GT015

## DIMENSIONS AND PRICES

Blades	Z	H	W [mm]									
			1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
no.	[mm]	[mm]	€	€	€	€	€	€	€	€	€	€
2	80	310										
3	80	460										
4	380	610										
5	380	760										
6	380	910										
7	380	1060										
8	680	1210										
9	680	1360										
10	680	1510										
11	680	1660										
12	980	1810										
13	980	1960										
14	980	2110										
15	980	2260										
16	1280	2410										

