

RSVC



VAV circular air flow regulator for the electronic control of the air flow in the supply or return ducts. Thanks to the actual air flow detection system, it is possible to guarantee an accurate control, regardless of the pressure variations inside the duct system, optimising energy consumption.

MATERIAL AND FINISH

- Frame in Z 140 galvanized steel, casing tightness class C EN 1751
- Blade in galvanized steel, tightness class 4 EN 1751

VERSIONS

- RSVC10...N1 base
- RSVC10...I1 glass wool insulation, 50 mm thick
- AISI 316 stainless steel (PRICES UPON REQUEST)

ACCESSORIES

Post-heating battery (see page 247)


CONTROLS

Standard version:


- RSVC10 with actuator LMV D3 MP F SG.

Other controls (PRICES UPON REQUEST):

- RSVC12 with actuator LMV-D3-LON
- RSVC16 with actuator LMV-D3-KNX
- RSVC20 with actuator LMV-D3-MOD
- RSVCX with explosion-proof actuator

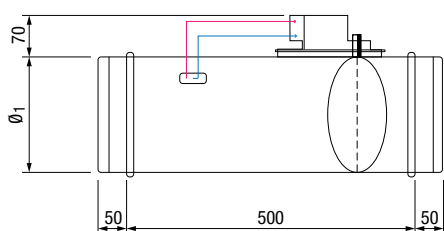

RSVC10...N1

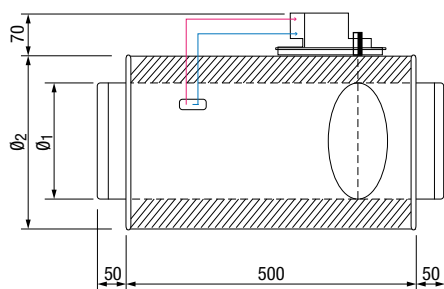

RSVC10...I1

DIMENSIONS AND PRICES

Ø _n	Dimensions [mm]		Weights [Kg]	RSVC10...N1	
	Ø ₁				€
125	123		2.3		
160	158		2.8		
200	198		3.5		
250	248		4.2		
315	313		5.4		
400	398		7		

Ø _n	Dimensions [mm]		Weights [Kg]	RSVC10...I1	
	Ø ₁	Ø ₂			€
125	123	225	5.4		
160	158	260	6.4		
200	198	300	7.5		
250	248	350	9		
315	313	415	11		
400	398	500	12		

QUICK SELECTION

V _{min} 2 m/s		Ø _n [mm]	V _{max} 14 m/s	
l/s	m ³ /h		l/s	m ³ /h
22	80	125	158	570
38	135	160	263	950
60	215	200	416	1500
95	340	250	660	2375
138	500	315	986	3550
245	880	400	1708	6150