



GP100K

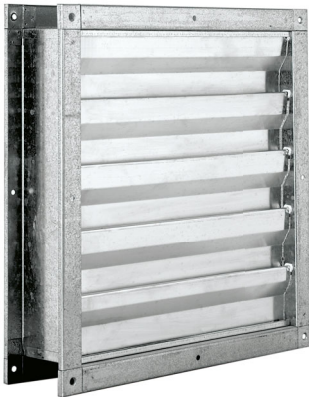

Overpressure damper with free blades with return to closing position by gravity.
 Vertical installation with single direction flow.
 In the case of counter-flow, the damper functions as a non-return element.
 Minimum opening pressure 15 Pa.

MATERIAL AND FINISH

- A Frame in galvanized steel Z140, duct-mounting.
- B Flange 36 mm, thickness 1 mm.
- C Aluminum blades, thickness 0.5 mm, movement by gravity, anti-noise gasket.
- D Rotation pins.
- E NYLON bushes.

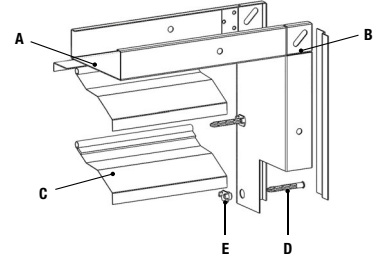

VERSIONS


- AISI316
- ATEX II 2 GD

(PRICES UPON REQUEST)
 + 33 €

DIMENSIONS AND PRICES

[mm] W	SINGLE SECTION										DOUBLE SECTION				
	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	
H	€	€	€	€	€	€	€	€	€	€	€	€	€	€	
210															
310															
410															
510															
610															
710															
810															
910															
1010															
1110															
1210															
1310															
1410															
1510															
1610															
1710															
1810															
1910															
2010															

NB: For the prices of the intermediate sizes, consider the next size on the table.
 Ex.: 650 x 410 mm = 700 x 410 mm
 For basic sizes > 1000 mm, construction in double section with centre separator



*See tech data sheet

