



PAS 25/2 / PAS 50/2



TECHNICAL SPECIFICATIONS	PAS 25/2 - PAS 50/2
Fire reaction	M 0 (F) - SI 476 p 6 (UK)
Operating temperature	-30° C +250° C

MATERIAL AND FINISH

Semi-rigid sound attenuator made up of 2 concentric aluminum flexible ducts separated by an insulating glass fibre pad in two versions.

FASTENING

Sealing flanges for connection at the ends.

VERSIONS

- PAS 25/2 25-mm-thick insulating pad
- PAS 50/2 50-mm-thick insulating pad


PRICES

Ø internal [mm]	PAS 25/2 per metre €	PAS 50/2 per metre €
80		
100		
125		
160		
200		
250		
315		
355		
400		

Carton content: 1 pcs lenght 1m

SOUND ATTENUATION

PAS 25/2

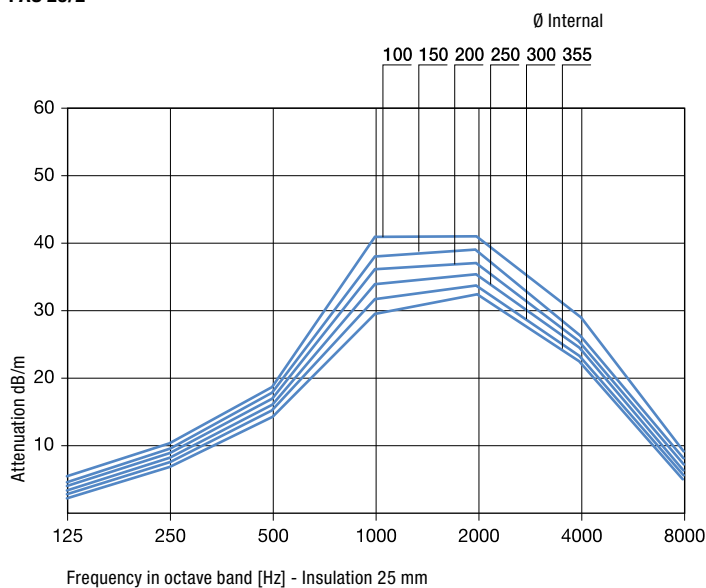

PAS 50/2

