

HTE400CL



Circular damper for wall- or floor-mounting in concrete, certified by EI-120S. Release/manual reset or with electric actuator. Closing takes place through fuse calibrated to 72°C.

MATERIAL AND FINISH

- **Frame** in galvanized steel with sealing gasket.
- **Blade** in calcium silicate with silicone gasket to seal off cold smoke and heat-expanding intumescent gasket for hot sealing.

VERSIONI


- **HTE400CL circular damper with manual control**
 - M1 with manual control, without microswitches
 - M3 with manual control, with two microswitches
- **HTE400CL circular damper with servo motor with limit switches, closing in 15 seconds**
 - S1 with Siemens 24 V electric actuator
 - S2 with Siemens 230 V electric actuator

DIMENSIONS AND PRICES

DN	Dimensions [mm]		HTE400CL M1	HTE400CL M3	HTE400CL S1	HTE400CL S2
	Ø	H ₁	€	€	€	€
100	98	-				
125	123	-				
150	148	-				
160	158	-				
200	198	-				
250	248	6				
315	313	38				

HTE400 CL-S*

*S1: SIEMENS 24V actuator
S2: Siemens 230V actuator

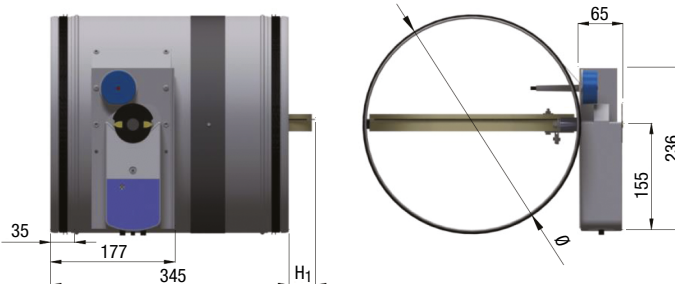

HTE400 CL-M**

** M1: Manual, without microswitches
M3: Manual with two microswitches

