

GS130I



The GS130I grilles for circular ducts in painted steel consist of a frame and blades in steel sheet profiled in single or double rows.

MATERIAL AND FINISH

- Grille in painted RAL9006 steel sheet
- Damper in galvanized steel.

APPLICATION

- Suitable for direct installation on circular ducts
- Summer ΔT up to $-10K$ and winter up to $+15K$.


FASTENING

- GS... with visible screws.

VERSIONS

- GS130I double row 1st vertical and 2nd horizontal
- GS120I single vertical row
- GS135I double row 1st vertical and 2nd horizontal with collecting regulating damper
- GS125I single vertical row with collecting regulating damper.

DIMENSIONS

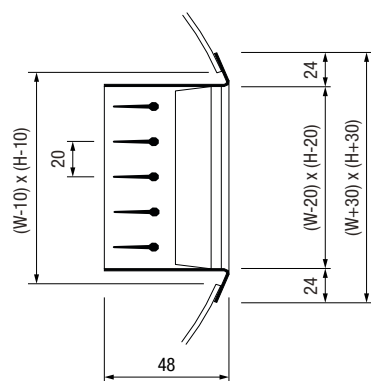


GS130I

| \emptyset duct [mm] | H [mm] |
|-----------------------|--------|
| 200 - 400 | 75 |
| 300 - 900 | 125 |
| 600 - 1600 | 225 |

PRICES

| Model | GS120I | GS130I | GS125I | GS135I |
|------------|--------|--------|--------|--------|
| | € | € | € | € |
| 300 x 75 | | | | |
| 400 x 75 | | | | |
| 500 x 75 | | | | |
| 600 x 75 | | | | |
| 800 x 75 | | | | |
| 300 x 125 | | | | |
| 400 x 125 | | | | |
| 500 x 125 | | | | |
| 600 x 125 | | | | |
| 800 x 125 | | | | |
| 1000 x 125 | | | | |
| 1200 x 125 | | | | |
| 300 x 225 | | | | |
| 400 x 225 | | | | |
| 500 x 225 | | | | |
| 600 x 225 | | | | |
| 800 x 225 | | | | |
| 1000 x 225 | | | | |
| 1200 x 225 | | | | |

ACCESSORIES

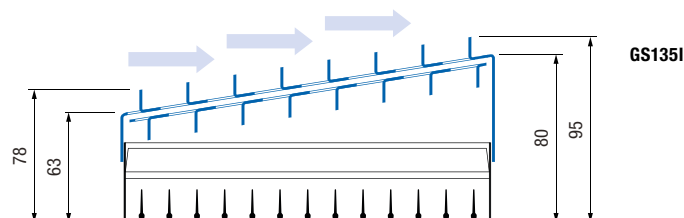

GS135I

GS130I

QUICK SELECTION

| | Q _{min} | Q ₃₅ | Q _{max} |
|-------------------------------------|------------------|-----------------|------------------|
| Pressure drop [Pa] | 30 | 45 - 55 | 60 - 85 |
| Noise level L _{WA} [dB(A)] | 30 | 35 | 40 |

Q₃₅: i.e. air flow value necessary to guarantee the sound power level L_W shown below

