

SPIN/Q



Patented



SPIN/Q square swirl diffusers can be configured in several colours in the concave vanes, to guarantee a distinctive architectural design.

MATERIAL AND FINISH

- Plate in painted steel, white RAL 9010
- Concave vanes in ABS plastic and available in several colours:
 - .../EB/ elements in white ABS plastic
 - .../EL/ elements in lavender blue ABS plastic
 - .../EV/ elements in pistachio green ABS plastic
 - .../ER/ elements in red ABS plastic
- Pyramid plenum in galvanized sheet
- ISOBOX-R pyramid plenum in polystyrene foam.

APPLICATION

- Used in stores, offices, exhibition halls, rooms where a particular architectural design is required
- Suitable for both VAV and CAV systems
- Installation height between 2.7 and 4 m
- ΔT up to 12 K.

FASTENING

Diffuser connected to the plenum by central screw. Plenum fastened to the ceiling by hanging. Fastening also using an assembly bridge.

ACCESSORIES



- BOX-PLR/D pyramid plenum with side collar and regulating damper
- BOX-PLRI/D pyramid plenum with side collar and regulating damper insulated in chemically reticulate closed cell polyethylene with th. 6 mm. **Fire reaction B-s1-d0 according to EN13501-1.**
- BOXT... plenum with rear collar (UPON REQUEST)
- ISOBOX-R plenum in polystyrene and side collar in polypropylene, with regulating damper and complete with brackets for ceiling assembly. (See page 90)
- GR005-SPIN/Q assembly bridge for false ceiling or rectangular duct installation.

PRICES

Model	SPIN/Q	Accessories			
		BOX-PLR/D	BOX-PLRI/D	ISOBOX-R	GR005-SPIN/Q
400					
500					
600					

DIMENSIONS


Model	Dimensions [mm]	
	$\square W_0$	$\square W_H$
400	395	376
500	495	476
600	595	576

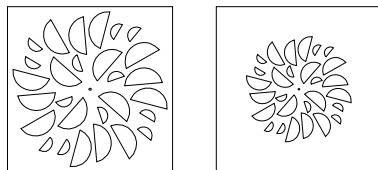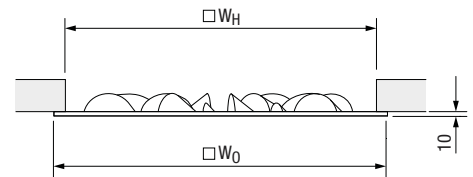

SPIN/Q

SPIN/Q/QR

QUICK SELECTION

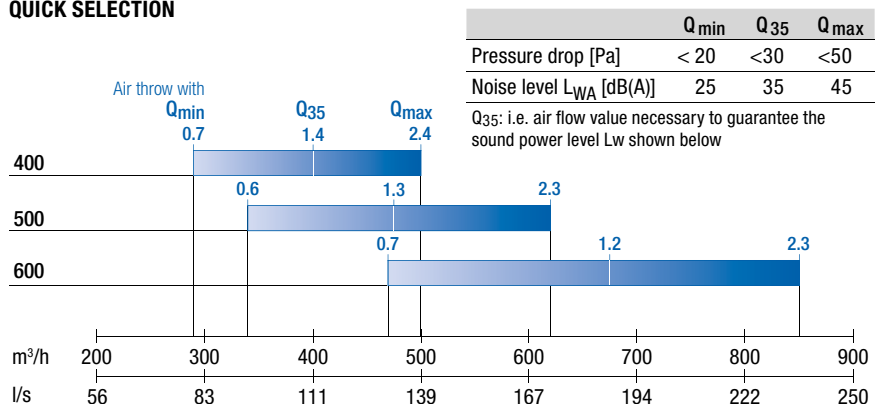


SPIN/Q


AIR DIFFUSION

ACCESSORIES


Model	Dimensions [mm]			
	W _P	H ₁	H ₂	Ø
400	390	300	325	198
500	490	300	325	198
600	590	350	375	248



BOX-PLR/D
Pyramid plenum

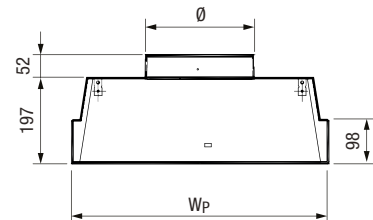


BOX-T
Plenums



GRO05-SPIN/Q
Assembly bridge



ISOBOX-R plenums
Distribution plenum

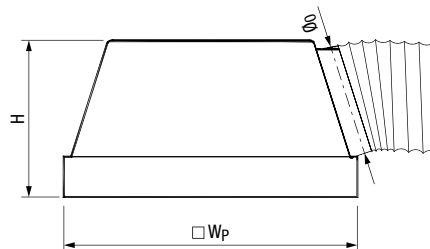

Model	Dimensions [mm]		
	□ W _P	H	Ø ₀
600 - Ø200	590	300	198
600 - Ø250	590	350	248